



Model SCGP17OW1AREF



Upright Refrigerator




BSI's space-saving upright refrigerator model is ideal for placement beside the work bench, requiring only 5.7 sq. ft. of floor space and carries a commercial rating for general laboratory use. This product utilizes proven technology used in the household appliance industry, but is manufactured to endure the rigors of commercial laboratory use and carries a warranty for this application. For performance assurance, each unit is completely tested and shipped with its unique pull down performance graph. The exterior is constructed of heavy gauge steel with a baked-on white epoxy coating for long lasting durability and scratch resistance. The interior is white molded ABS with no seams for easy cleaning and decontamination. The interior environment is protected by CFC-free, high-density foamed-in-place urethane insulation. Additional standard features include four adjustable epoxy coated shelves, two removable bins for large item storage and four shelves on the door, an interior light, adjustable temperature control, reversible door and adjustable leveling legs.

Specifications

Temperature Range Refrigerator -5° to $+10^{\circ}$ C (23° to 50° F)
 Average temperature uniformity better than $\pm 1^{\circ}$ C in product @ $+4^{\circ}$ C

Dimensions Exterior 30" W(76.2 cm) x 30.5" D(77.47 cm) x 66" H(167.64 cm)
 Interior 25" W(63.5 cm) x 22.8" D(57.91 cm) x 55.7" H(141.48 cm)

Capacity 17 cu. ft. 418.3 liters
 Net weight 158 lbs. 71.67 kg.
 Shipping weight 184 lbs. 83.46 kg

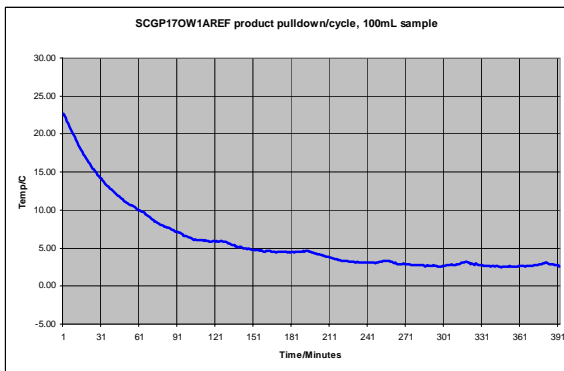

Typical performance ambient pull-down



Refrigerator above shown with companion -20 freezer